


# FINISHING PADDERS

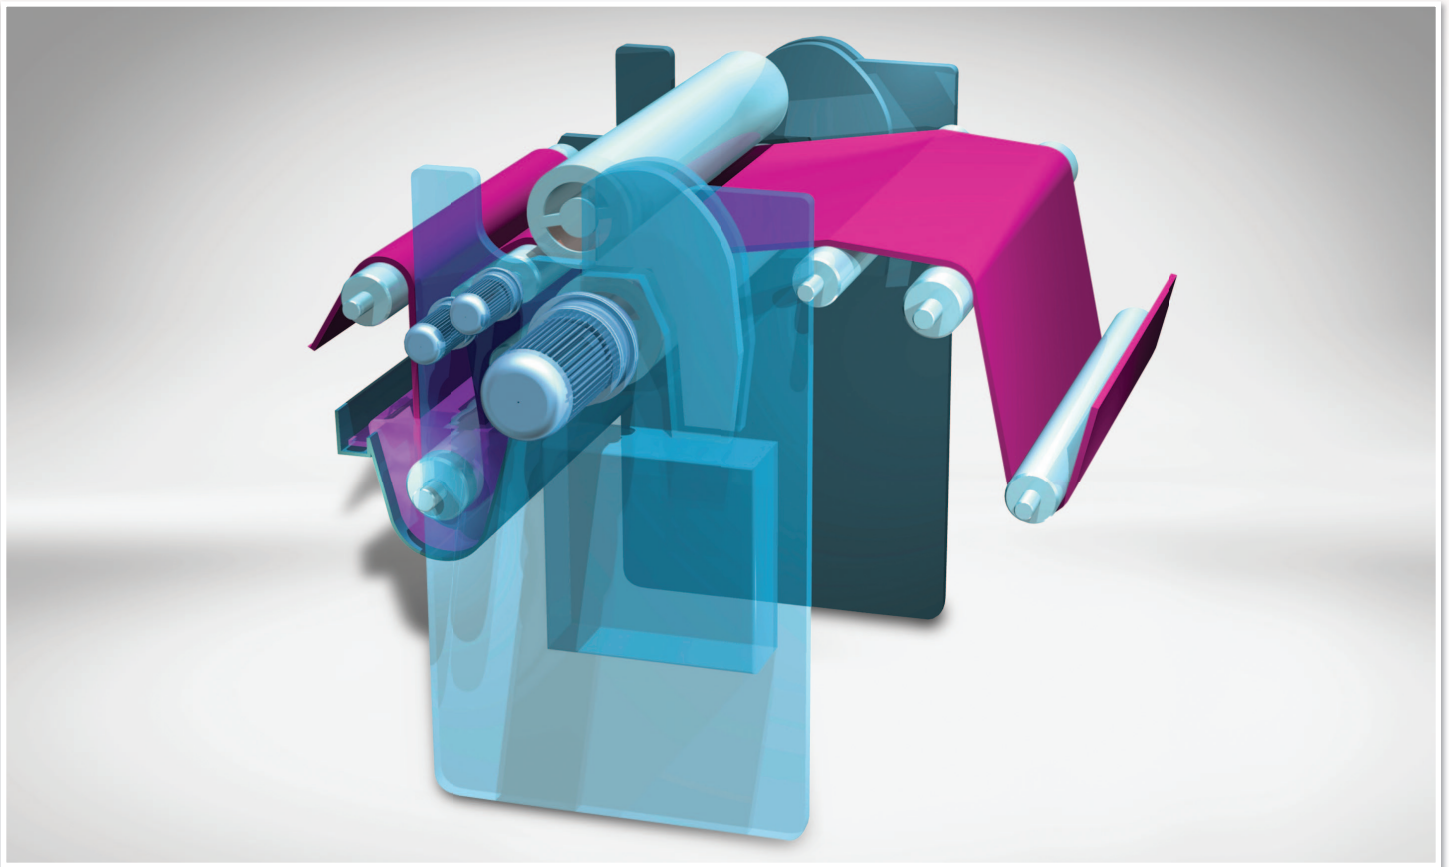

## FEATURES

Uniform linear pressure over the entire roller width, also in the case of varying nip pressures by means of a S-Roll with continuous deflection control

Also available without an S-Roll

Liquor trough, lifted and lowered pneumatically, heating and cooling possible minimum liquor content




**TEXTILE ■ NON-WOVEN**


a division of KUSTERS ZIMA

## TECHNICAL SPECS

|                                | <b>222.52</b>  | <b>222.53</b>  | <b>222.54</b>  | <b>222.58</b>  |
|--------------------------------|--|--|----------------|--|
| <b>Number of S-Rolls</b>       | 1  | 1  | 1              | 1  |
| <b>Roll Width</b>              | 1600...2400 mm   | 2400...4000 mm   | 3800...5200 mm | 1600...2400 mm   |
| <b>Diameter of S-Roll</b>      | 160/180mm;<br>ww = 1600mm<br>190/210mm;<br>ww ≥ 1800mm | 220/240mm;<br>ww ≤ 2800mm<br>270/290mm;<br>ww ≥ 3000mm | 320/340 mm     | 160/180mm;<br>ww = 1600mm<br>190/210mm;<br>ww ≥ 1800mm |
| <b>Diameer of Support Roll</b> | 240mm;<br>ww = 1600mm<br>270mm;<br>ww ≥ 1800mm         | 295mm;<br>ww ≤ 2800mm<br>320/340mm;<br>ww ≥ 3000mm     | 470/490 mm     | 240mm;<br>ww = 1600mm<br>270mm;<br>ww ≥ 1800mm         |
| <b>Max. Liner Pressure</b>     | 50 N/mm  | 50 N/mm  | 50 N/mm        | 50 N/mm  |

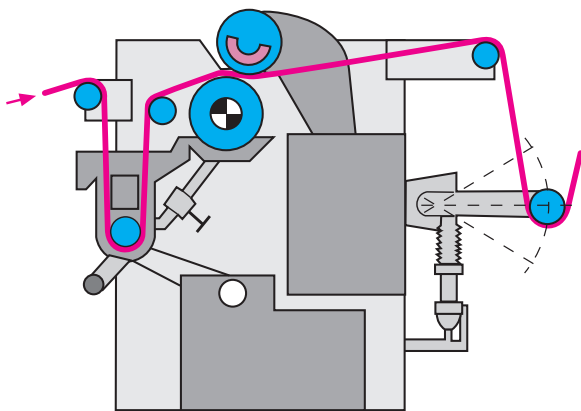

222.52/53/54

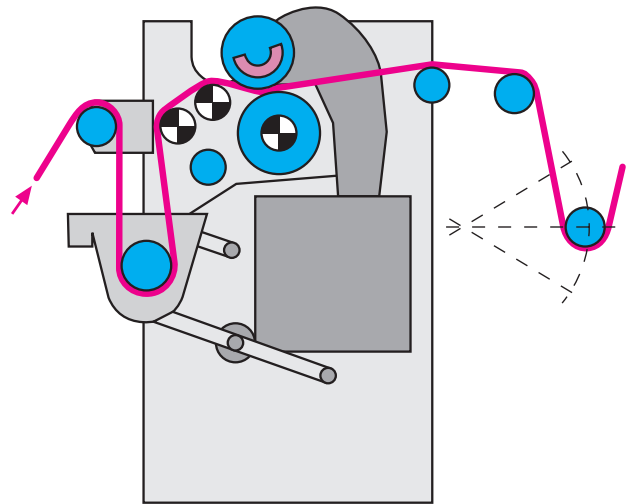

222.58

For more information call **864.576.0660** or visit [KustersZima.com/textile-non-woven](http://KustersZima.com/textile-non-woven)



**TEXTILE ■ NON-WOVEN**

a division of KUSTERS ZIMA